
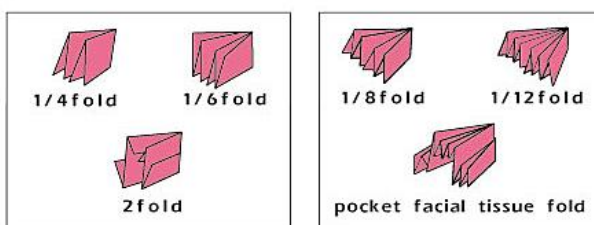


RF-106+RF-616 袖珍包面紙製造設備

Pocket Facial Tissue Marking Line

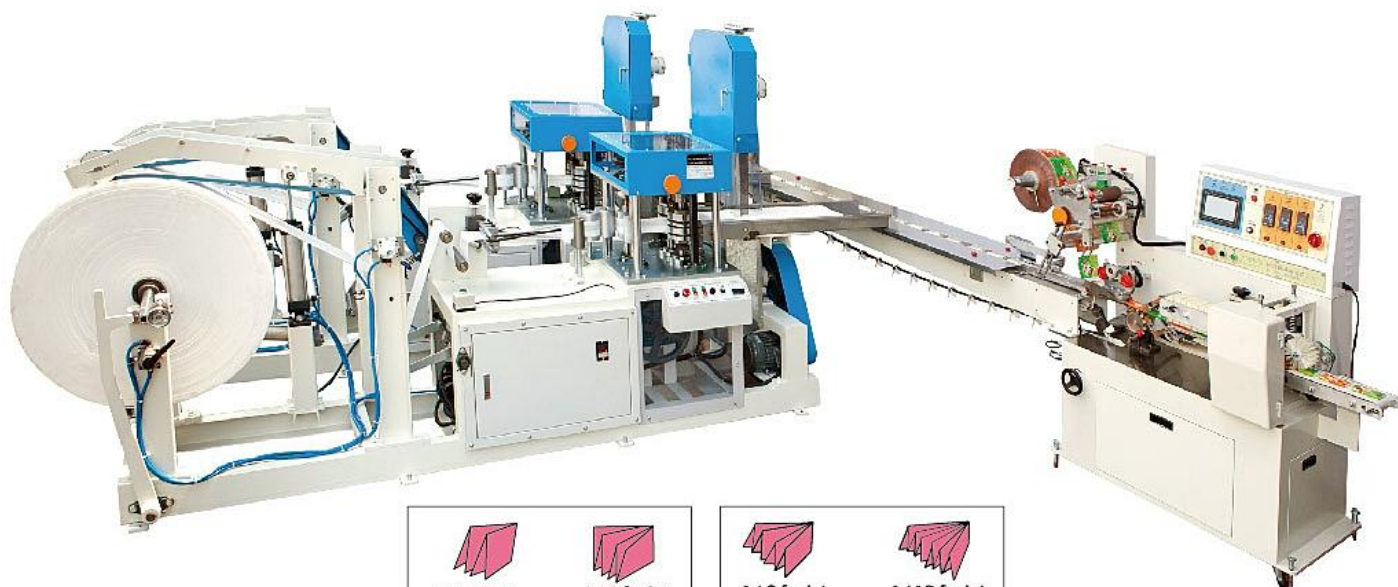

特點:

摺疊、定型、橫交互摺疊、切斷、計數、計量，而生產出攜帶方便的袖珍面紙。
亦有長度微調裝置，故障少、損紙率低、投資小、產量大。

Features :

Folds, sets shape, interfolds, cuts, counts, and measures
Micro-adjustable length helps lower breakdown rate and waste
Less investment but high capacity



型號	Model No.	RF-106 H	原紙直徑	Parent roll dia.	Ø1200mm(Max)
面紙尺寸	Open Sheet size	(L) 210mm x (W)210mm	紙蕊直徑	Core dia.	Ø76.2mm
摺疊尺寸	Folded size	(L) 105mm x (W)52-72mm	馬力	Power	3HP(Inverter) + 2HP (AC) motor
生產能量	Capacity	500~1000 sheets/min.	電壓	Voltage	220 / 380V 3 Phase,50/60HZ
卷紙層數	Converting web	1~3 layer facial tissue peper	機械尺寸	Machine size	(LxWxH) 3600x1100x2090 mm
原紙寬度	Parent roll width	180~220mm	淨重 /毛重	N.W /G.W	1500 kgs / 1900 kgs

型號	Model No.	RF-616 H	馬力	Power	1Hp,220V 50/60HZ, Single phase
型式	Packing type	枕狀式包裝袋 Pillow type	縱電熱器	Vertical Heater	350w * 1隻 350w * 1 pcs
包裝材質	Packing Material	OPP, CPP, And Laminated...etc.	橫電熱器	Horizontal Heater	200w * 4隻 200w * 4 pcs
背封口包裝型式	Center sealing style	單點, 多點式,連續式 One Point, Up to continues	裝箱尺寸	Measurement	主機(Machine):1900x1000x1750mm 輸送帶(Conveyor):3160x500x400mm
包裝速度	Packing speed	60~180包/分鐘 (視包裝物材質與餵料而定)	包裝尺寸	Packing Size	長(L):90~135 寬(W):50~100 高(H):7~12mm (依規格內可選擇) Packing size selectable
		60~180 bag/min.(Depending on packing material & feeding speed.)	淨重 /毛重	N.W /G.W	850 kgs / 950 kgs



陸鋒機械廠有限公司

242 新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel:886-2-29979318,29967014 Fax:886-2-29979319 Email:rufengmc@ms37.hinet.net

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RU FENG MACHINERY CO., LTD.

AUTOMATIC VOLUMETRIC FILLING MACHINE FOR LIQUIDS

with six filling tubes:

六管式全自動液體定量充填機

**NEWLY
INTRODUCED!**
PATENT PENDING

Model:RF-1500A6

High quality and
multi-function.

**高品質
多功能**



Auto filling speed:30-70bottles/minute. 自動充填速度：每分鐘30~70瓶

Applications: Suitable liquid types for filling : Salad oil, sesame oil,body cleanser, shampoo,
hair conditioner, engine oil,lubrication oil,detergent,and medical liquid, etc.

適用之充填液體種類：

沙拉油、麻油、醬油膏、沐浴乳、冷洗精、洗髮精、洗髮乳、機油、潤滑油、清潔劑、藥劑水等。



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel:886-2-29979318,29967014 Fax:886-2-29979319 Email:rufengmc@ms37.hinet.net


Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RU FENG MACHINERY CO., LTD.



Special and unique designed bottle inlet fixture ensuring correct and precise position of filling.

優點：特設瓶口固定夾，可正確充填之位置。



FEATURES:


- 1.Components and panels are made of various types of stainless steel for acid resistance and corrosion prevention.
- 2.Use of pneumatic cylinder for filling position control.
- 3.Photoelectric controlled auto filling stop when there is no bottle or a empty bottle present.
- 4.Adjustable bottle guides on conveyor for a wide variety of bottle sizes and shapes.
- 5.Stepless filling speed control and adjustment.
- 6.Design of simple operation and high reliability with least maintenance requirement.

MODEL NO.	CAPACITY c.c.	HORSEPOWER HP	AIR PRESSURE HP	VOLTAGE V	FREQUENCY Hz	DIMENSIONS HxWxL cm	WEIGHT kg
RF-1500A6	150-500 300-1000 500-1500	3½	1.0	220,380,440	50/60	Machine 170x125x430	Net 380
						Packing 185x135x450	Gross 550

CC.歡迎任意選購(Optional)

特 性：

- 1.主要零件及鋼板均由各式不銹鋼材料組成完全防止銹蝕。
- 2.壓縮空氣控制充填動作。
- 3.呈現缺瓶或空瓶時，電眼控制充填自動停止。
- 4.可調整式輸送導引柵，可適合各式大小及形狀之容器。
- 5.無段變速式充填速度控制及調速。
- 6.機械設計強調簡易操作及高可靠度，並將保養需要減至最低限度。

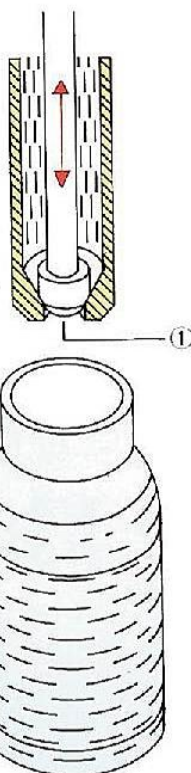

Features:

- ① Special and unique design of internal piston mechanism preventing filling fluid from dripping.

優點：

- ① 特設充填管口內栓裝置，無唾液滴落。

RF-903 全自動三角包包裝機

Vertical Triangle Pouch packing machine



RF-903 適用範圍

花生, 糖果, 豆子, 綜合果仁, 玉米條, 茶葉, 玩具, 以及其他相類似的化工、藥劑調味品、顆粒狀物體

RF-903 Application

Peanuts, Candy, Beans, Mixed nuts, Corn curls, Tea, Toys, the other similar, mixer powder and granules substance.


RF-903 設備特點

操作方便、維修簡單、質量準確、性能穩定、體積小、噪音低、投資省, 採用先進的光電控制分切精確。微電腦步進控制、自動完成製袋、封口、計數及多邊袋半切的一次性完成。


RF-903 Features

Easy to operation, maintainers, built-in high sensitivity high respond photo detector insures correctly positioned, cutting even at high speed operation. **The photoelectric control system** performs precisely, ensuring the products to be of excellent quality. **Step motor control system, Automatic Forming-Sealing-Cutting.**

Selectable for Vertical Triangle type pouch packing and Pillow type pouch packing.

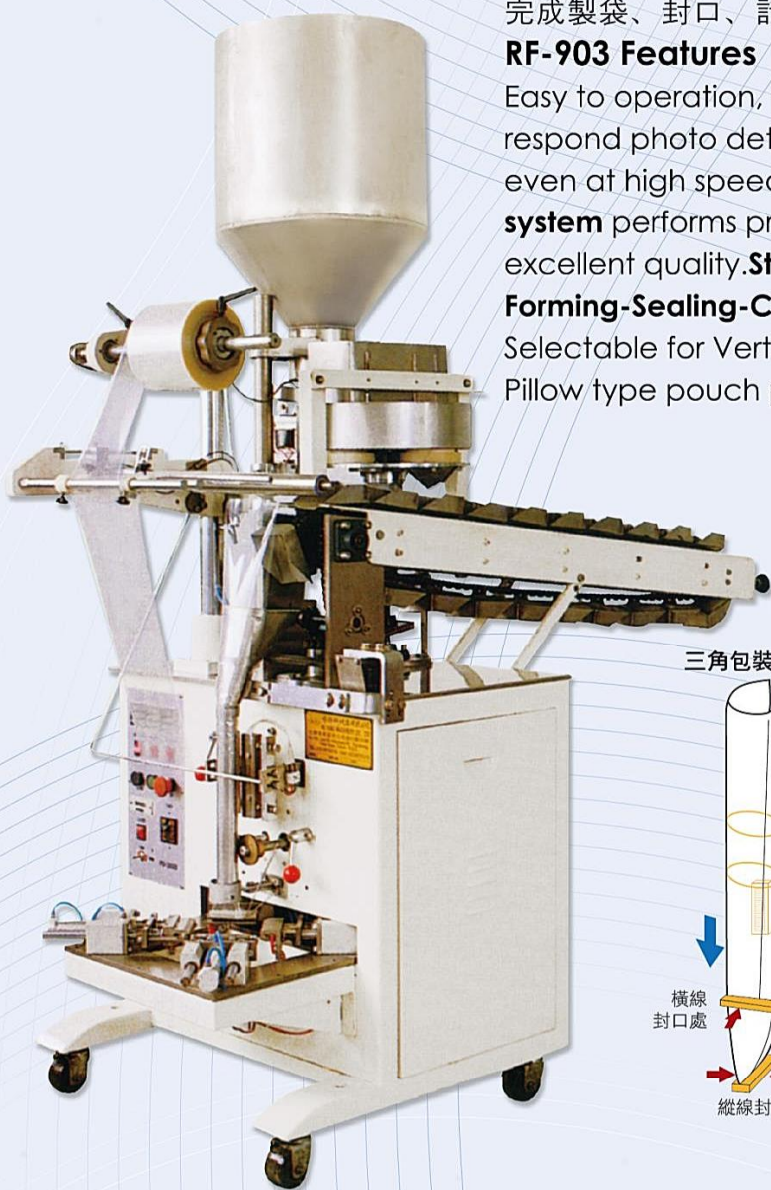

三角包裝視圖

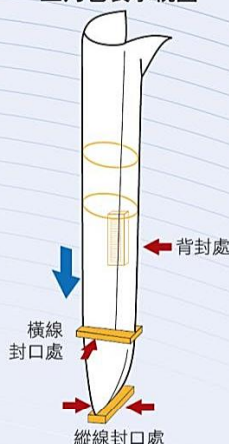

機型 MODEL	RF-903 全自動三角包包裝機 Vertical Triangle Pouch packing machine
包裝尺寸 Packing Size	長(L)50-120mm 寬(W)50-80mm
包裝膜尺寸 Packing film Size	寬(W)100-160mm
包裝速度 Packing speed	20-80包/分 (視包裝物大小、 膠膜、材質、厚度而定) 20-80 Bags/min (Depending on packing size)
包裝材質 Packing material	OPP,CPP,PET等可熱封材料 OPP,CPP,PET, Any sealble film
動力 Power	1/2馬力 220V 50/60 Hz 1/2HP 220V 50/60 Hz
裝箱尺寸 Measurement	1900x950x1600mm
毛重 Gross weight	310Kgs
淨重 Net weight	380Kgs



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel:886-2-29979318,29967014 Fax:886-2-29979319 Email:rufengmc@ms37.hinet.net

RU FENG MACHINERY CO., LTD.



微電腦控制高速濕巾自動製造包裝機

SERVO SYSTEM HIGH SPEED AUTOMATIC WET TOWEL MACKING MACHINE

(FLAT TYPE 扁型)

RF-660 H




Function:

1. From Bulk Material to packed wet towel is completely automatic untouched by human contact.
由原紙到成品完全不與人接觸, 保持衛生.
2. Suitable for restaurant, hotel, parties, tour bus or train, KTV, SPA, Gymnasium and other recreational centers.
適合航空公司, 旅遊, 賓館, 海鮮, 烤肉, 中西式餐廳, 旅社, 宴會, SPA, 網咖, 健身中心, KTV, 巴士, 火車.....



包裝型態 Packing Type	包裝物體 Filling Item	包裝材料 Packing Material	包裝速度 Packing Speed	使用電力 Power Required	主力馬力 Main Drive Motor	主機尺寸 Machine Body	裝箱尺寸 Package Woden case	各部分動力 獨立使用伺服
扁平狀 Flat Type	無塵紙 不織布 Airlaid Paper Non-woven	Opp,Cpp film Thickness 0.025-0.035mm	80-320包/每分 80-320 Bags/min	5Kw	2馬力,三相 50-60 赫茲 2Hp,220V 3Phase,0-60Hz	410x90x175 cm Space Required: 20M ²	Packed Volume: 12M ³	Sections power Independent use sero motors

- | | | | |
|-------------------------------|-----------------------------------|------------------------------------|---|
| 1. Raw Material
原 紙 | 6. Opposite Fold Section
對折導板 | 11. Forming Box
成型器 | 16. Electric Control Box
電器控制箱 |
| 2. Bend Lead Plate
折 疊 | 7. Equidistance Transport
等距輸送 | 12. Longitudinal Seal Roll
縱封口輪 | 17. Product Output Conveyor
出口皮帶 |
| 3. Conveyor Belt Set
輸送皮帶組 | 8. Lead wheel
導輪 | 13. Sponge Conveyor
海綿皮帶 | 18. Product Packing Conveyor
成品包裝輸送帶 |
| 4. Liquid Spray
噴霧區 | 9. Plastic Material
包裝膠膜 | 14. Servo controller
微電腦伺服控制器 | |
| 5. Cutter Stand
切斷 | 10. Mark Sensor
電眼追蹤 | 15. End Seal & Cut
端封與切斷 | |

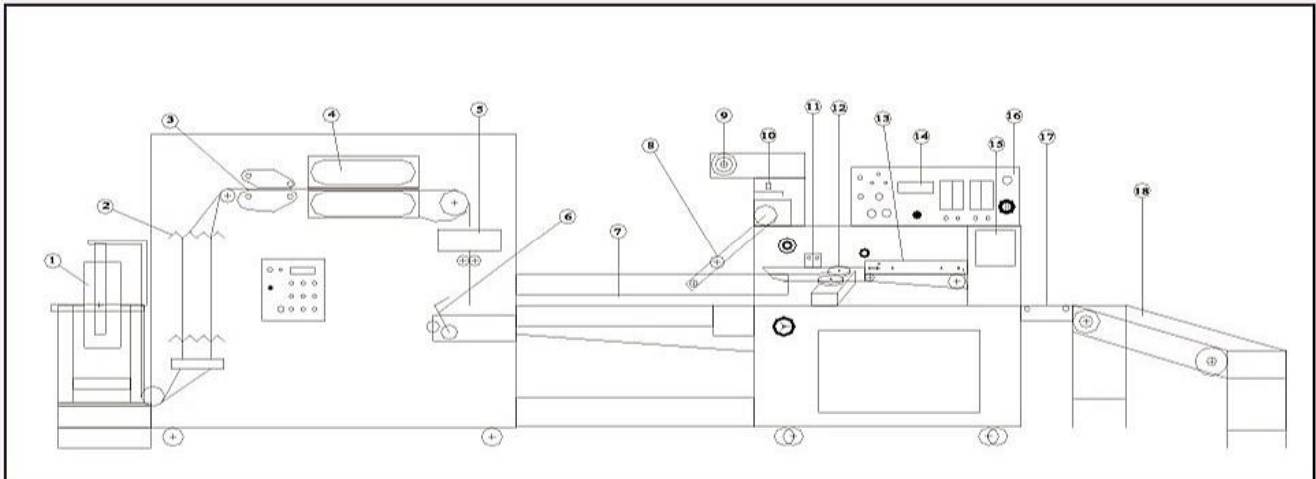

使用規格：

包裝型態：扁平狀
 製品尺寸：長 200~270mm, 寬 200~270mm
 折疊後尺寸：寬 35mm ~50mm 可變換
 成品袋尺寸：長110~190mm. 可調整
 寬45~75mm. 可變換
 生產速度：80 ~ 320 包/每分鐘
 電力：220v, 50/60Hz, 4kw
 控制系統：6軸伺服控制器
 原紙材料：無塵紙, 不織布...
 原紙尺寸：寬180mm~270mm.
 紙蕊直徑：內徑 76.2mm, 外徑1500mm
 包裝膜材質：CPP, OPP, 多層膜包材
 機器佔地面積：6M * 5M
 機器尺寸：
 折疊機：長2600mm, 寬2000mm, 高2000mm
 包裝機：長3000mm, 寬2200mm, 高1750mm
 外銷裝箱尺寸：
 折疊機：長2880mm, 寬 900mm, 高2300mm
 包裝機：長3000mm, 寬1000mm, 高1750mm
 輸送帶：長2300mm, 寬1000mm, 高1500mm
 機器重量：淨重 2200kgs 毛重 2500kgs
 選購配備：日期標示機, 純水過濾設備, 空氣壓縮機

SPECIFICATIONS:

Packing Type : Flat Type.
 Product Dimension : L200~270, W200~270mm.
 Folded Dimension : 35~50mm. Change Able.
 Packing Dimension : L110~190mm, Adjustable.
 W45~75mm. Change Able.
 Production Rate : 80 ~ 320 bag/min.
 Power : 220v, 50/60Hz, 4kw.
 Control system :6-shaft servomotor control system.
 Paper Material : AIR LAID PAPER, NON-WOVEN...
 Initial Paper Width :180~270mm.
 Roll Diameter :Inner 76.2, Outer Max. 1500mm.
 Wrapping Material : CPP, OPP, Laminate Film.....
 Machine Space : 6M * 5M.
 Machine Size:
 Folding Machine : L 2600mm,W 2000mm,H 2000mm.
 Packing Machine : L 3000mm,W 2200mm,H 1750mm.
 Export Wooden Case:
 Folding Machine : L 2880mm,W 900mm,H 2300mm.
 Packing Machine : L 3000mm,W 1000mm,H 1750mm.
 Accessory : L 2300mm,W 1000mm,H 1500mm.
 Machine Weight : N.W. 2200kgs, G.W. 2500kgs.
 Option Spare : Date Coder, Water Filter&
 Air Compressor.

陸鋒機械廠有限公司

RU FENG MACHINERY CO., LTD.
 新北市新莊區化成路211巷11號
 TEL : +886-2-29979318, 29967014
 FAX: +886-2-29979319

No.11, Ln. 211, Huacheng Rd., Xinzhuang District,
 New Taipei City 24252, Taiwan (R.O.C.)
 E-mail: rufengmc@ms37.hinet.net
<http://www.tacocity.com.tw/~kwlin>
<http://www.rufengmc.com.tw>

全自動圓筒型濕紙巾製造機

FULLY AUTOMATIC WET TOWEL MAKING MACHINE

(ROLLER TYPE) 圓型



RF-650

■ 紙巾成品

Product Samples



特點：

1. 無塵紙巾用完即丟，安全衛生，可燃可化，符合國際環保。
2. 觸感柔細，可加溫或冷藏。
3. 廣泛使用於旅館、餐廳、KTV、醫院、戶外郊遊。

■ 選購設備UF/RO-300C純水機

Pure Water Filter Equipment
(Option Spare)



FUNCTION

From Bulk Materials To Packaged Towels Is Completely Automatic

The Simplicity And Easy Operation, Greatly Reduces Labor Costs And Guarantees A Thoroughly Sanitary Products Being Completely Automatic


1. The Wet Towel Are Untouched By Human From Start To Finish , Which Prevents The Spread Of Germs And Contagious Diseases By Human Contact.
2. Guaranteeing You Of A Safe And Soft.
3. Use In Restaurant, Hotel, Hospital, Tourist Bus And Train.

★製造機分析圖

- 1.Raw Material
原 紙
- 2.Raw Material Fixture
原紙固定桿
- 3.Paper press plate.
原紙壓版
- 4.Raw Material Lead Wheel
原料導輪
- 5.Opposite Bend Lead Plat
對折導版
- 6.Lead Wheel
導 輪
- 7.Cutter stand
輸送皮帶組

- 8.Cutter Stand
切 刀 座
- 9.Length adjust
紙長調整
- 10.Water Collection
集水槽
- 11.Cut and Add perfume
分斷加香水
- 12.Circular Forming
搓圓成形
- 13.Equidistance Transport
等距輸送
- 14.Plastic Material
塑膠外包裝材料

- 15.Mark Sensor
電眼校隊
- 16.Lead Wheel
導 輪
- 17.Longitudinal Seal Roll
縱封口輪
- 18.Sponge Conveyor
海綿皮帶
- 19.End Seal & Cut
端封與切斷
- 20.Electric Control Box
電器控制箱
- 21.Product Conveyor
成品輸送帶

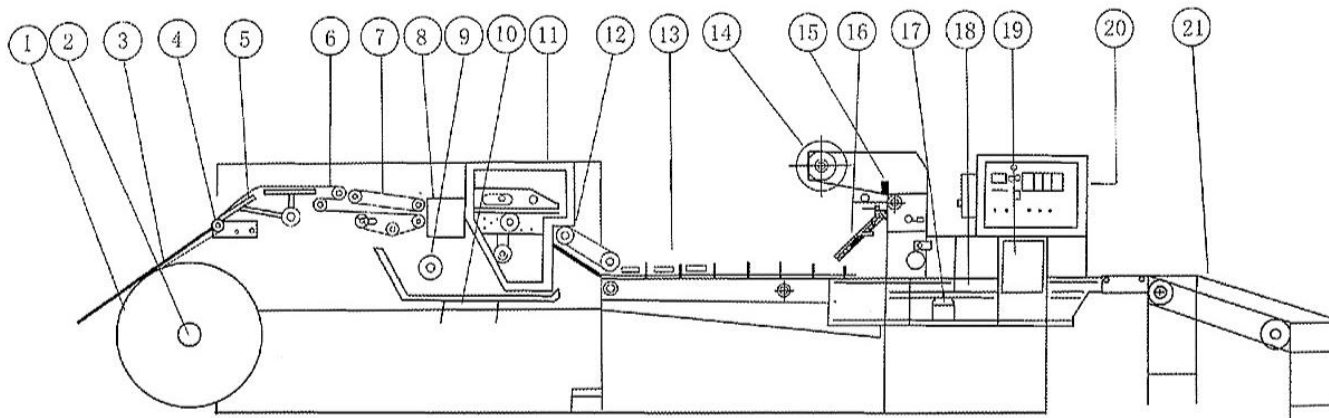

使用規格:

包裝型態: 圓筒狀
 製品尺寸: 270L × 260W 或 200L × 180W (mm)
 折疊尺寸: 135L × 30W 或 110L × 30W (mm)
 包裝尺寸: 190L × 38W 或 110L × 38W (mm)
 生產速度: 100-250 條/分
 電力: 5kw 單相 220V50/60Hz
 主力馬達: 2HP 變頻器速度控制
 濕巾材質: 單層無塵紙 50-80GM/m²/
 無塵紙尺寸: W200-350mm, 最大直徑 1.2m
 原紙寬度: 180mm-240mm
 原紙直徑: 1200mm Max
 紙蕊直徑: 76.2mm
 包裝材料: CPP, OPP & 多層膜
 CPP 膜寬度: 115mm
 長 度: 190mm 或 150mm
 厚 度: 0.02mm-0.025mm
 蕊心直徑: 76.2mm
 機器佔地面積: 6M × 6M (實際 4M × 5M)
 機器尺寸:

1. 定寸捲圓機: L3500 × W1500 × H2000 (mm)
 2. 包裝機: L2600 × W850 × H1550 (mm)
 3. 輸送帶: L2000 × W500 × H820 (mm)
- 木箱包裝尺寸: (A) L2850 × W1000 × H2200 (mm)
 (B) L2850 × W1000 × H1750 (mm)
 (C) L1300 × W1200 × H1300 (mm)

選購配備: 日期標示, 純水過濾設備, 空氣壓縮機。

SPECIFICATIONS:

Packing Type: Roll Type
 Product Dimension(mm): 270L × 180W or 200L × 180W (mm)
 Folded Dimension(mm): 135L × 30W or 110L × 30W (mm)
 Packaged Dimension(mm): 190L × 38W or 110L × 38W (mm)
 Production Rate: 100-250 bags/min
 Power: 5kw 220V Single Phase 50/60Hz
 Main Drive Motor: 2HP Inverter Speed Control
 Wet towel Material: AIR Laid: 50-100GM/m² / Non Woven
 Air Laid Paper Size: W200-350mm × Dia. 1.2m
 Initial Paper Width: 180mm-240mm
 Initial Paper Diameter: 1200mm Max
 Cone Roll Diameter: 76.2mm
 Wrapping Material: CPP, OPP, Laminate, Etc.
 CPP Film Width: 115mm
 Length: 150mm or 190mm (Adjustable)
 Thickness: 0.02mm-0.025mm
 Cone Roll Diameter: 76.2mm
 Machine Space: 6M × 6M (In Fact 4M × 5M)
 Machine Size:

1. Rolling machine: L3500 × W1500 × H2000 (mm)
2. Packing Machine: L2600 × W850 × H1550 (mm)
3. Conveyor: L2000 × W500 × H820 (mm)

Wooden Cases: (A) L2850 × W1000 × H2200 (mm)
 (B) L2850 × W1000 × H1750 (mm)
 (C) L1300 × W1200 × H1300 (mm)

Option Spare: Date Printer, Water Filter, Air Compressor.

陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號
 TEL: +886-2-29979318, 29967014.
 FAX: +886-2-29979319
 Http://www.rufengmc.com.tw

RU FENG MACHINERY CO., LTD.

No.11, Ln. 211, Huacheng Rd., Xinzhuang District,
 New Taipei City 24252, Taiwan (R.O.C.)
 EM: rufengmc@ms37.hinet.net
 Http://www.tacocity.com.tw/kwlin

RF-632 集體包橫式自動包裝機

Horizontal Flow Wrapping Machine



日期標示機選購配備：



適用範圍：

適用於捲筒衛生紙、擦手巾大包裝之豆乾、豬血糕、餅乾、速食麵、荷包米粉、冬粉...各種固型物多件之包裝。

Main Applications：

Dry bean curd, biscuits, instant noodle, rice noodle, bean threads, dry bean curds, hand towel, toilet paper roll, hard wear...



機 型 MODEL	RF-632		
包 裝 型 式 Packing Type	枕狀式包裝袋 Pillow Type	主 力 馬 達 Main Drive Motor	2Hp, 220V 單相 2Hp, 220V Single phase
包 裝 速 度 Packing Speed	10~50包/分鐘 (視包裝物材質與 餵料而定) 10~50 bag/min. (Depending on packing material & feeding speed.)	輔 助 馬 達 Control Motor	電眼馬達: 40W*1, 袋長馬達: 15W*1 Photo sensor Motor: 40w *1 Bag Length Motor: 15w *1
包 裝 尺 寸 Packing Size	長(L): 90~350mm 寬(W): 50~250mm 高(H): 20~80mm (依規格內可選擇機型) Packing size selectable	縱電熱器 Vertical Heater	350w * 2隻 350w * 2 pcs
		橫電熱器 Horizontal Heater	400w * 4隻 400w * 4 pcs
包 裝 材 質 Packing Material	OPP, CPP, 及多層貼合膠 膜...等自動包裝機可熱封 膠膜. OPP, CPP, And Laminated...etc.	裝箱尺寸 Measurement	主機(Machine): 1900x1000x1750mm (G.W 800kgs) 輸送帶(Conveyor): 3160x500x400mm (G.W150kgs)
機 器 淨 重 Net Weight	1200KGS	機 器 毛 重 Gross Weight	1450KGS
背封口包裝型式	連續式	Center sealing style	continues

A. 機械特點優異的功能：

- 特殊可調整製袋器：能將包裝物集中貼身包裝，保持美觀。
- 防止誤切裝置：電眼檢測，防止誤切。
- 包裝膜下置式，能包裝集體物件避免鬆開，無碎料包裝更密閉。
- 集合式包裝，免用泡殼裝填降低成本。

A. FEATURES :

- Adjustable forming box: keep packing tight, performs precisely.
- Mark sensor check cutting accuracy.
- The downward feed of the film and chain feed style, to the packing of the strip solid with regular shapes.
- Without try packing, Down cost without try from and with regular shapes.

B. 選擇裝置：

- 打孔裝置：能包裝袋內多餘的氣消除，防止澎風容易裝紙箱，更美觀。
- 背口使用特殊封口花輪：能將包裝袋背封改變成網狀封紋或直線封使背封更有選擇性更美觀。
- 日期標示機。

B. Optional Accessories & Special Versions :

- With needle puncher release air, easily for packing in cartons.
- Center sealer roll variety design for selection.
- Date Coder.



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel: 886-2-29979318, 29967014 Fax: 886-2-29979319 Email: rufengmc@ms37.hinet.net

RU FENG MACHINERY CO., LTD.

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RF-621 (RF-621L) 多用途固定型物體自動包裝機

Automatic Forming/Filling/Sealing Machine



Adjustable forming box(optional spare)

可調式成形器(可選擇裝配)

Special designed adjustable forming box both in height and width.
You don't need to change this forming box or any parts when
product size changes are mead.

可調式成形器可配合您的產品作任意調整，不必更換成形器或任何零件。



Hot foil code printer(optional spare)

熱燙式製造日期/批號機(選購配備)

A synchronous hot foil printer gives perfectly clear date/code at
any position required on each pack.

同步運轉之熱燙式製造日期裝箱可在包裝袋之任何位置標示清晰正確之
日期及批號。



RF-621 適用範圍

速食麵、餅乾、麵包、果凍、冰棒、牙刷、膠袋、香皂、面紙、藥品、零件、器材等食品雜貨及五金類固型物品之包裝。

RF-621 Applications

Instant noodles, biscuits, bread, soap, toothbrushes, egg rolls, ice cream, candy bars, wet paper towels, and other solid items.

RF-621 特性

- 優異的雙迴陸電眼控制系統，監控性能特別精確，確保產品美觀。
- 定位輸送皮帶設計，使包裝物在高速作業中能保持輸送平穩、精確。
- 機械結構採高強度的設計，使機械運轉中，特別平穩、堅固、耐用。
- 多種選用設備之功能擴充，如：日期批號、自動餵料系統、折角裝置、可調式製袋器等。

RF-621 Feature

- The double-circuit photoelectric control system performs precisely, ensuring the products to be of excellent quality.
- The positioned conveying belt design guarantees stable and precise conveying under high-speed operation.
- The strongly constructed machine lasts long and performs stably and firmly in operation.
- Various optional facilities are available; an automatic data marker, an automatic feeding system, a gusseting device, an adjustable forming box.

RF-621 可選加裝的零件



- 日期印刷器：標明製造日期、保存期限等。
- 機器的外殼全部由不銹鋼或鋁合金打造。
- 枕式三面封口的包裝形態。

RF-621 Optional accessories & Special versions

- Data code, to print manufacturing date, expiry date, etc.
- Whole stainless steel with aluminum alloy shell
- Pillow type 3 side seal of packing type.

*本公司因設計上的需要，保留更改的權力。

*Descriptions and specifications are subject to changes without notice.

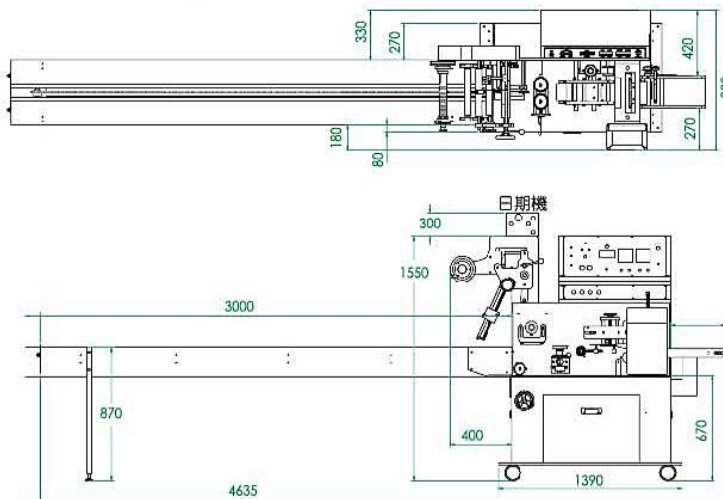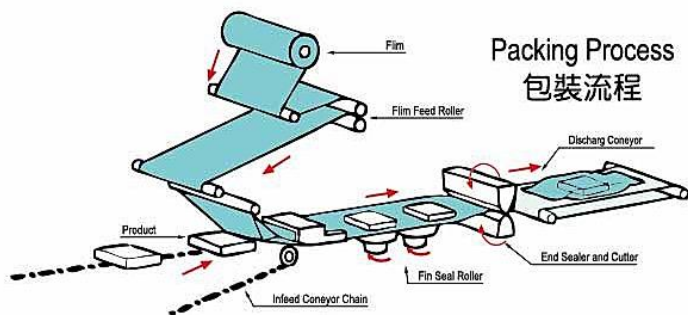

機型 MODEL	多用途固定型物體自動包裝機 Automatic Forming/Filling/Sealing Machine	
	RF-621	RF-621L
型式 Packing type	枕狀式袋子 Pillow type	
包裝尺寸 Packing Size	長 (L) 70-300mm 寬 (W) 30-180mm 高 (H) 10-50mm	長 (L) 150-400mm 寬 (W) 100-250mm 高 (H) 50-120mm
包裝速度 Packing speed	25-180包/分 (視包裝物大小、膠膜、材質、厚度而定) 25-180 Bags/min (Depending on packing size)	
包裝材質 Packing material	OPP, CPP, PET, 模造紙、鋁箔合膠層等可熱封材料 OPP, CPP, PET, Alum foil laminated, etc	
主力馬達 Main drive motor	1馬力 220V 單相 50/60 Hz 1HP 220V Single phase 50/60 Hz	
輔助馬達 Control motor	減速馬達 200V, 40W Single phase motor 200V, 40W	
縱電熱器 Vertical heater	350Wx2	
橫電熱器 Horizontal heater	200Wx4	
裝箱尺寸 Measurement	Machine主機 1900x1060x1800mm Conveyor輸送帶 3350x570x450mm	Machine主機 1900x1100x1800mm Conveyor輸送帶 3350x600x500mm
毛重 Gross weight	1130Kgs	1230Kgs
淨重 Net weight	1000Kgs	1100Kgs



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel: 886-2-29979318, 29967014 Fax: 886-2-29979319 Email: rufengmc@ms37.hinet.net

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RU FENG MACHINERY CO., LTD.

RF-621 (RF-621S) 多用途固定型物體自動包裝機

HFFS Automatic Forming/Filling/Sealing Machine



Adjustable forming box(optional spare)

可調式成形器(可選擇裝配)

Special designed adjustable forming box both in height and width. You don't need to change this forming box or any parts when product size changes are mead.

可調式成形器可配合您的產品作任意調整，不必更換成形器或任何零件。



Hot Ink code printer(optional spare)

熱燙式製造日期批號機(選購配備)

A synchronous hot ink printer gives perfectly clear date code at any position required on each pack.

同步運轉之熱燙式製造日期裝備可在包裝袋之任何位置標示清晰正確之日期及批號。



RF-621S 適用範圍

速食麵、餅乾、麵包、果凍、冰棒、牙刷、膠袋、香皂、面紙、藥品、零件、器材等食品雜貨及五金類固型物品之包裝。

RF-621S Applications

Instant noodles, biscuits, bread, soap, toothbrushes, egg rolls, ice cream, candy bars, wet paper towels, and other solid items.

RF-621S 特性

- 優異的雙迴陸電眼控制系統，監控性能特別精確，確保產品美觀。
- 定位輸送皮帶設計，使包裝物在高速作業中能保持輸送平穩、精確。
- 機械結構採高強度的設計，使機械運轉中，特別平穩、堅固、耐用。
- 多種選用設備之功能擴充，如：日期批號、自動餵料系統、折角裝置、可調式製袋器等。

RF-621S Feature

- The double-circuit photoelectric control system performs precisely, ensuring the products to be of excellent quality.
- The positioned conveying belt design guarantees stable and precise conveying under high-speed operation.
- The strongly constructed machine lasts long and performs stably and firmly in operation.
- Various optional facilities are available; an automatic data marker, an automatic feeding system, a gusseting device, an adjustable forming box.

RF-621S 可選加裝的零件


- 日期印刷器：標明製造日期、保存期限等。
- 機器的外殼全部由不銹鋼或鋁合金打造。
- 三面封口的包裝形態。

RF-621S Optional accessories & Special versions

- Data code, to print manufacturing date, expiry date, etc.
- Whole stainless steel with aluminum alloy shell
- 3 side seal of packing type.

*本公司因設計上的需要，保留更改的權力。

*Descriptions and specifications are subject to changes without notice.

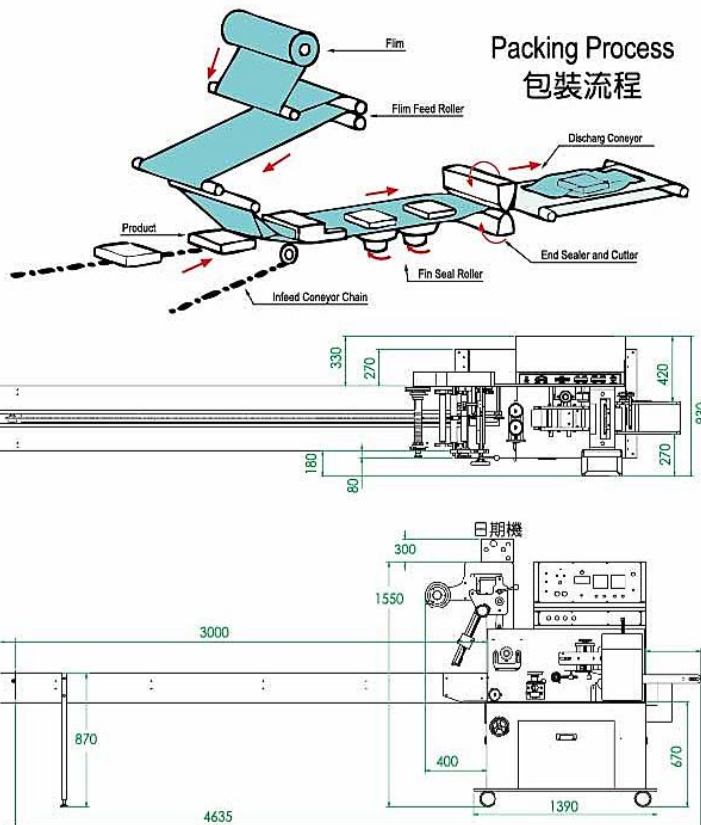

機型 MODEL	多用途固定型物體自動包裝機 Automatic Forming/Filling/Sealing Machine	
	RF-621S	RF-621L
型式 Packing type	枕狀式袋子 Pillow type	
包裝尺寸 Packing Size	長 (L)70-300mm 寬 (W)30-180mm 高 (H)10-50mm	長 (L)150-400mm 寬 (W)100-250mm 高 (H)50-120mm
包裝速度 Packing speed	25-180包/分 (視包裝物大小、膠膜、材質、厚度而定) 25-180 Bags/min(Depending on packing size)	
包裝材質 Packing material	OPP, CPP, PET, 模造紙、鋁箔合膠層等可熱封材料 OPP, CPP, PET, Alum foil laminated, etc	
主力馬達 Main drive motor	1馬力 220V 單相 50/60 Hz 1HP 220V Single phase 50/60 Hz	
輔助馬達 Control motor	減速馬達 200V, 40W Single phase motor 200V, 40W	
縱電熱器 Vertical heater	350Wx2	
橫電熱器 Horizontal heater	200Wx4	
裝箱尺寸 Measurement	Machine主機 1900x1060x1800mm Conveyor輸送帶 3350x570x450mm	Machine主機 1900x1100x1800mm Conveyor輸送帶 3350x600x500mm
毛重 Gross weight	1130Kgs	1230Kgs
淨重 Net weight	1000Kgs	1100Kgs



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel:886-2-29979318, 29967014 Fax:886-2-29979319 Email:rufengmc@ms37.hinet.net

RU FENG MACHINERY CO., LTD.

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>




RF-616 袖珍包面紙專用包裝機 POCKET TISSUE WRAPPING MACHINE



袖珍包面紙 POCKET TISSUE WRAPPING



衛生棉 Sanitary napkin

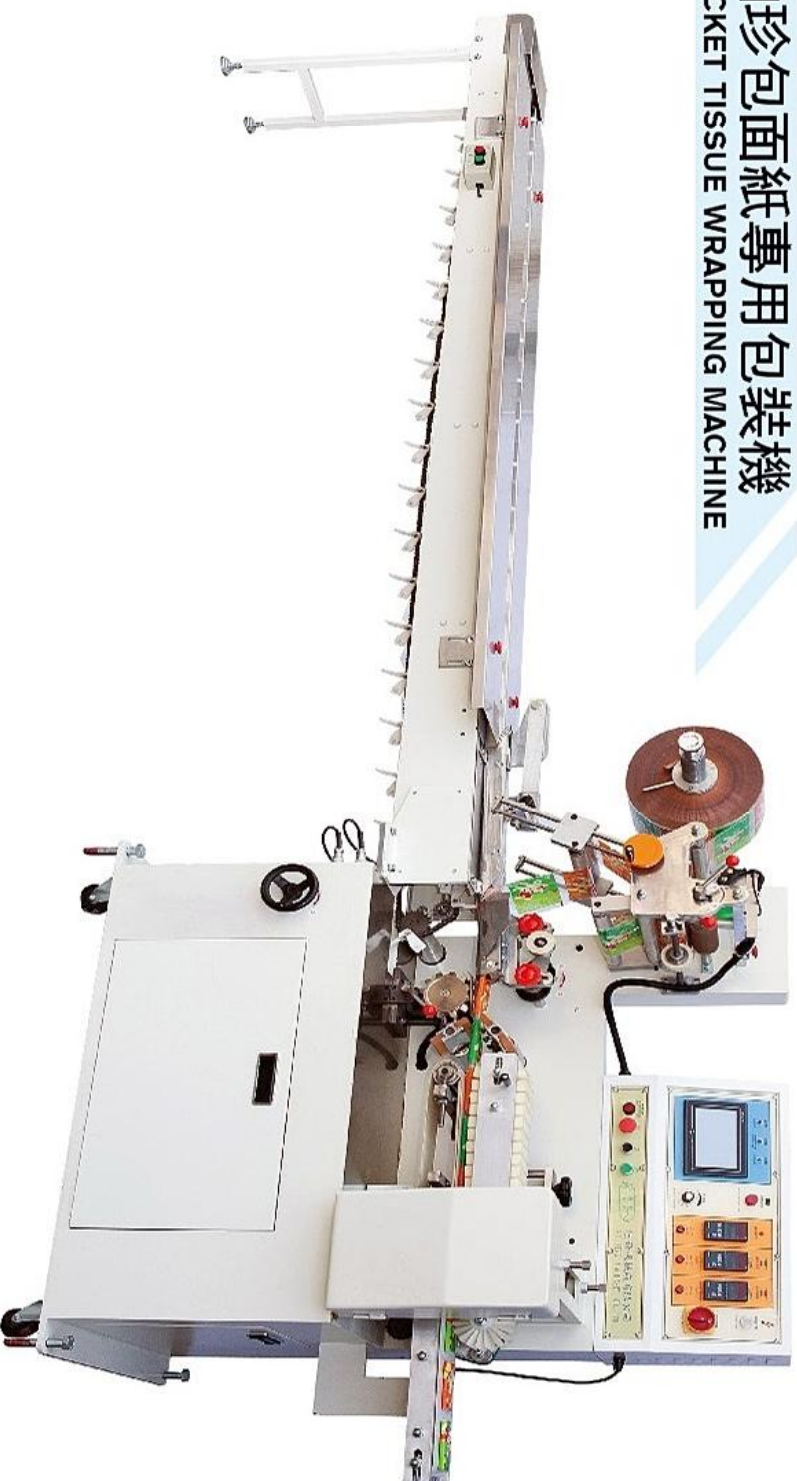

Length Display easy for operation,

長度顯示, 操作更容易

Speed control速度控制

Any desired production rate within the range of 25-200 pack per minute may be varied infinitely by means of a single dial knob.

包裝速度從每分鐘25到200包可由一旋轉鈕作任意的無段調速以配合最佳生產率。

Temperature control溫度控制

Independent temperature control for each sealer to make the best sealing and handle a wide variety of flexible packaging materials.

各封口面獨立溫度控制，適應多種包裝材料並得到最美麗、牢固的封口效果。
Photo detector(optional spare)電眼追蹤

Built-in high sensitivity high respond photo detector insures correctly positioned, even at high speed operation.

內藏式高感度電眼追蹤設備，即使在高速操作下亦可獲得正確之封口位置。

可選擇配備 (OPTIONAL SPARE)



海報送紙機

Poster paper machine



整列機 Finishing machines



下紙卡機

AUTOMATIC CARD FEEDER



墨球式 Hot Ink Roll Type
碳帶式 Ribbon Tape Type

機 型	RF-616 袖珍包面紙專用包裝機		
MODEL	POCKET TISSUE WRAPPING MACHINE		
包 裝 型 式	枕狀式包裝袋	主 力 馬 達	1Hp, 220V單相
Packing Type	Pillow Type	Main Drive Motor	1Hp,220V Single phase
包 裝 速 度	60~180包/分鐘 (視包裝物材質與餵料而定)	輔 助 馬 達	電眼馬達 :40W*1
			袋長馬達 :15W*1
Packing Speed	60~180 bag/min. (Depending on packing material & feeding speed.)	Control Motor	Photo sensor Motor : 40w *1
			Bag Length Motor: 15w *1
包 裝 尺 寸 Packing Size	長(L):90~135mm	縱電熱器	350w * 1 隻
	寬(W):50~100mm	Vertical Heater	350w * 1 pcs
	高(H):4~12mm	橫電熱器	200w * 4 隻
依規格內可選擇	Packing size select able	Horizontal Heater	200w * 4 pcs
包 裝 材 質	OPP, CPP.及多層貼和膠膜..	裝箱尺寸	主機(Machine):
	等自動包裝機可熱封膠膜		1900x1000x1750mm (G.W 800kgs)
Packing Material	OPP, CPP. And Laminated..etc. Heat seal able Flim	Measurement	輸送帶(Conveyor):
			3160x500x400mm (G.W150kgs)
機 器 淨 重	850 KGS	機 器 毛 重	950KGS
Net Weight		Gross Weight	
背封口包裝型式	單點, 多點式,連續式	Center sealing style	One Point, Up to continues

機械特點優異的功能：

- 特殊圓型製袋器：能將紙巾貼身包裝,保持美觀.
- 防止誤切裝置：能將紙巾進入製袋器後再次定位一次防止誤切.
- 打孔裝置：能將紙巾進入製袋器多餘的氣消除防止澎風容易裝紙箱.更美觀.
- 端封口使用特殊細牙封口：能將紙巾包裝袋,更美觀.
- 背口使用特殊圓型封口花輪：能將包裝袋背封改變成單點封, 多點封或直線封使背封更有選擇性更美觀.

Features：

- special round bag former: Paper towels can be close-packing, nice shape.
- Prevent device by mistake: paper towel after entering the bag once again positioned to prevent false positives.
- With needle puncher release air easily for packing in cartons.
- End sealed using a special fine thread sealing: paper towel bags, more beautiful.
- Back round sealer using a special flower round: bag back into a single point, multipoint or straight line style making the back more selective beauty.

陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號
TEL:+886-2-29979318, 29967014.
FAX:+886-2-29979319
Http://www.rufengmc.com.tw

RU FENG MACHINERY CO.,LTD.

No.11, Ln. 211, Huacheng Rd., Xinzhuang District,
New Taipei City 24252, Taiwan (R.O.C.)
EM:rufengmc@ms37.hinet.net
Http://www.tacocity.com.tw/kwlin

RF-601M 口罩自動包裝機

Face Mask Packing Machine



Control Box 控制箱

在呼吸道傳染病盛行的時期，口罩是我們防疫時期保護自身最重要環節，口罩1片、3片、5片、10片包裝，口罩的獨立包裝可以避免口罩在運輸之中受到汙染，方便攜帶，可打吊掛孔方便銷售，本包裝機採用高品質耐用的材料製造，機台耐用同時維修保養簡易，能夠大幅降低人工費用，同時提高包裝生產的速度。

During the prevalence of respiratory infectious diseases, Masks are the most important link to protect ourselves during the epidemic prevention period, masks 1 pc, 3 pcs, 5 pcs, 10 pcs/pack, The masks are individually packaged to avoid contamination of the masks during transportation, easy to carry, can be Hanging holes punched to facilitate sales, This packaging machine is made of high-quality and durable materials, The machine is durable and easy to maintain, Can greatly reduce labor costs, At the same time increase the speed of packaging production



- 1.熱燙式製造日期/批號機(選購配備)
Hot foil code printer (optional spare)
 - 2.磁帶式製造日期/批號機(選購配備)
Ribbon stamping code printer (optional spare)
- A synchronous hot foil printer gives perfectly clear date / code at any position required on each pack.
同步運轉之熱燙式製造日期裝帶可在包裝袋之任何位置標示清晰正確之日期及批號。

RF-601M 適用範圍

口罩1片、3片、5片、10片包裝

防疫用品

RF-601M Application

masks 1 pc, 3 pcs, 5 pcs, 10 pcs/pack

Epidemic prevention supplies

RF-601M 優異的功能

長度顯示，操作更容易

■ 速度控制

空機速度從每分鐘30到180包可由一旋轉鈕作任意的無段調速以配合最佳生產率。

■ 溫度控制

各封口面獨立溫度控制，適應多種包裝材料並得到最美觀、牢固的封口效果。

■ 電眼追蹤

內藏式高感度電眼追蹤設備，即使在高速操作下亦可獲得正確之封切位置。

■ 熱燙式製造日期/批號機

同步運轉之熱燙式製造日期裝備可在包裝袋之任何位置標示清晰正確之日期及批號。

RF-601M Features

Length Display easy for operation,

■ Speed control

Any desired production rate within the range of 30-180 pack per minute may be varied infinitely by means of a single dial knob.

■ Temperature control

Independent temperature control for each sealer to make the best sealing and handle a wide variety of flexible packaging materials.

■ Photo detector(optional spare)

Built-in high sensitivity high respond photo detector insures correctly positioned, cutting even at high speed operation.

■ Hot foil code printer(optional spare)

A synchronous hot foil printer gives perfectly clear date/ code at any position required on each pack.

RF-601M 可選加裝的零件

■ 熱燙式製造日期/批號機，標明製造日期、保存期限等。

■ 自動送料系統。

■ 吊掛式打孔。

■ 包裝成品計數整列機。

RF-601M Optional accessories & Special versions


■ Data code, to print manufacturing date, expiry date, etc.

■ Automatic feeding system.

■ Hanging holes punched

■ Pack finished product counting and permutation machine

Packing Process 包裝流程

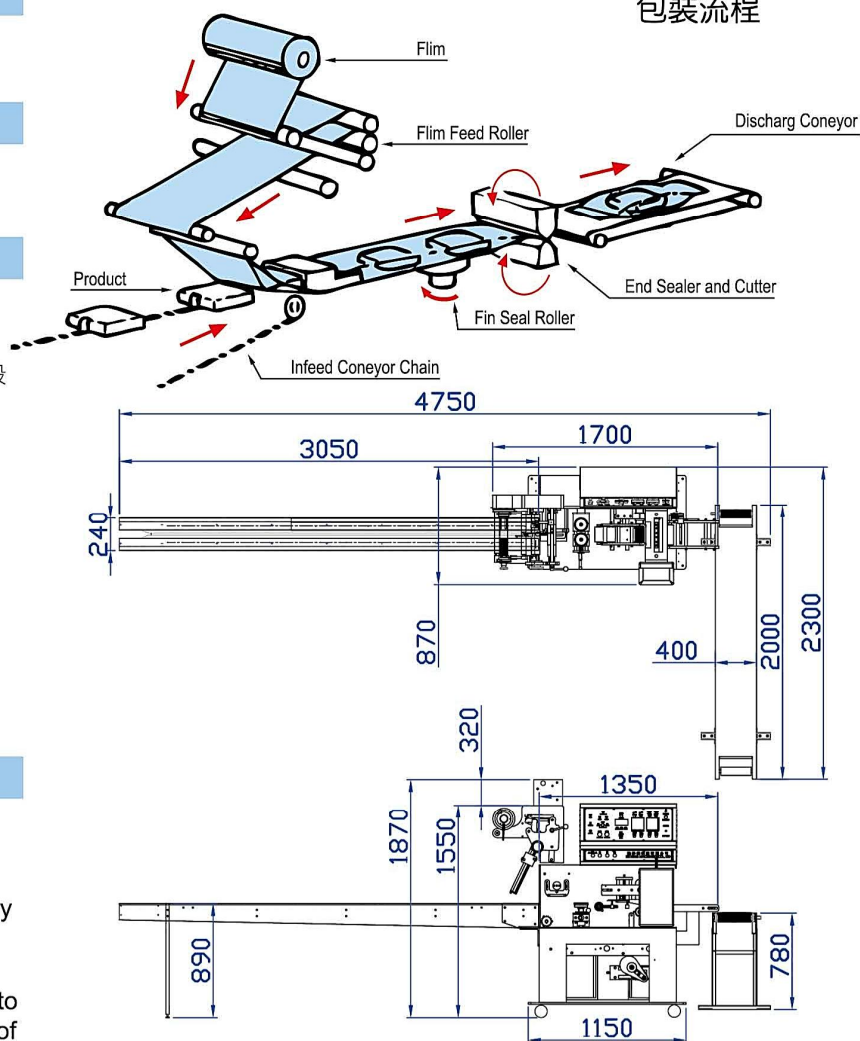

機型 MODEL	RF-601M 口罩自動包裝機 Face Mask Packing Machine		
型式 Packing type	枕狀式袋子 Pillow type	主力馬達 Main drive motor	1馬力 220V單相 50/60 Hz 1HP 220V Single phase 50/60 Hz
包裝速度 Packing speed	30-120包/分 視包裝物大小膠膜材質 厚度而定 30-120 Bags/min Depending on packing size	輔助馬達 Control motor	減速馬達 220V,40W Single phase motor 220V, 40W
包裝材質 Packing material	OPP, CPP, PET, 多層膜、等可熱封材料 OPP, CPP, PET, etc	縱電熱器 Vertical heater	350Wx 2
包裝尺寸 Packing Size	長 (L)150-230mm 寬 (W)70-130mm 高 (H)3-16mm	橫電熱器 Horizontal heater	200Wx 4
裝箱尺寸 Measurement	Machine主機 1800x1000x1750 Conveyor輸送帶 3350x570x950		
毛重 G.W.	1100 Kgs	淨重 N.W.	950 Kgs



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)


Tel:886-2-29979318,29967014 Fax:886-2-29979319 Email:rufengmc@ms37.hinet.net

RU FENG MACHINERY CO., LTD.

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RF-601 固形自動包裝機

Automatic Wrapping Machine

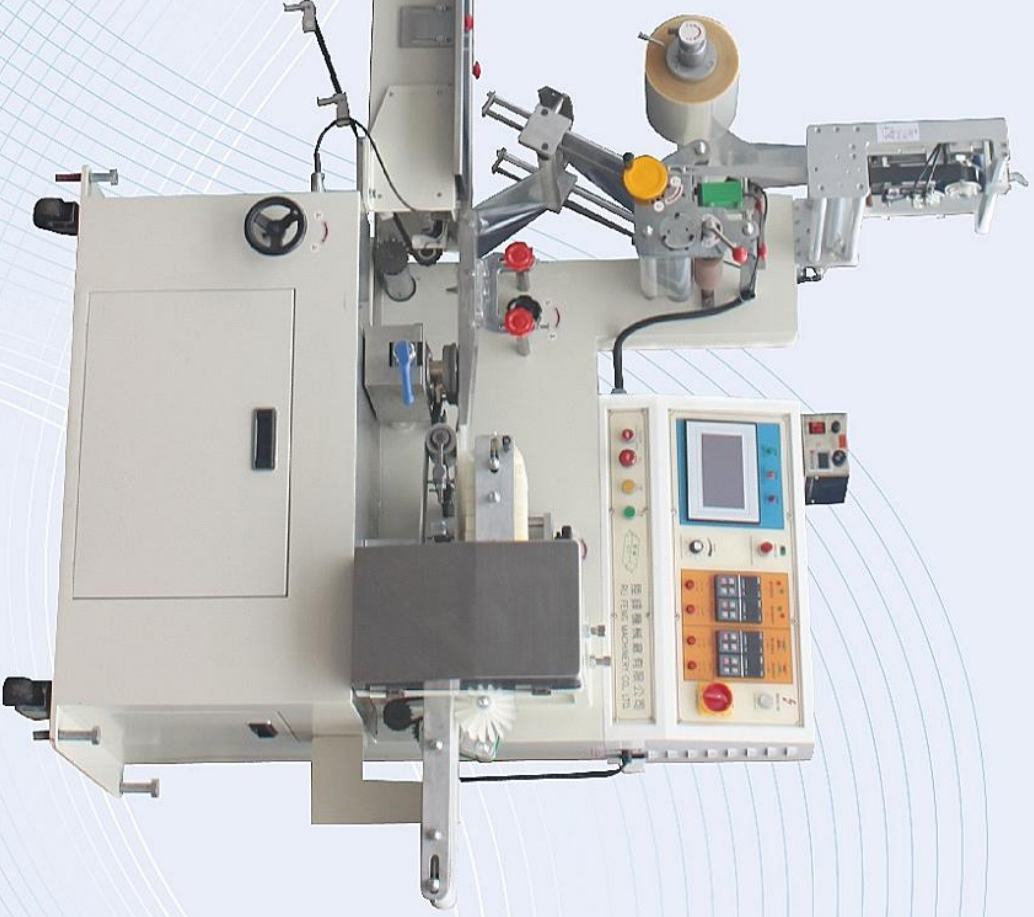

Length Display easy for operation,

長度顯示，操作更容易

Speed control速度控制

Any desired production rate within the range of 25-200 pack per minute may be varied infinitely by means of a single dial knob. 包裝速度從每分鐘25到200包可由一旋轉鈕作任意的無段調節以配合最佳生產率。

Temperature control溫度控制

Independent temperature control for each sealer to make the best sealing and handle a wide variety of flexible packaging materials.

各封口面獨立溫度控制，適應多種包裝材料並得到最美麗、牢固的封口效果。

Photo detector(optional spare)電眼追蹤

Built-in high sensitivity high respond photo detector insures correctly positioned, cutting even at high speed operation. 內藏式高感度電眼追蹤設備，即使在高速操作下亦可獲得正確之封口位置。



Control Box 控制箱



Hot foil code printer (optional spare)

熱燙式製造日期 / 批號機 (選購配備)

A synchronous hot foil printer gives perfectly clear date / code at any position required on each pack.

同步運轉之熱燙式製造日期裝機可在包裝袋之任何位置標示清楚正確之日期及批號。

RF-601 適用範圍

速食麵、餅乾、麵包、果凍、冰棒、牙刷、膠袋、香皂、面紙、藥品、零件、器材等食品雜貨及五金類固型物品之包裝。

RF-601 Application

Instant noodles, biscuits, bread, soap, toothbrushes, egg rolls, ice cream, candy bars, wet paper towels, and other solid items.

RF-601 優異的功能

- 長度顯示，操作更容易
- 速度控制
包裝速度從每分鐘25到200包可由一旋轉鈕作任意的無段調速以配合最佳生產率。
- 溫度控制
各封口面獨立溫度控制，適應多種包裝材料並得到最美麗、牢固的封口效果。
- 電眼追蹤
內藏式高感度電眼追蹤設備，即使在高速操作下亦可獲得正確之封切位置。
- 熱燙式製造日期/批號機
同步運轉之熱燙式製造日期設備可在包裝袋之任何位置標示清晰正確之日期及批號。

RF-601 Features

- Length Display easy for operation,
- Speed control**
Any desired production rate within the range of 25-200 pack per minute may be varied infinitely by means of a single dial knob.
- Temperature control**
Independent temperature control for each sealer to make the best sealing and handle a wide variety of flexible packaging materials.
- Photo detector**(optional spare)
Built-in high sensitivity high respond photo detector insures correctly positioned, cutting even at high speed operation.
- Hot foil code printer**(optional spare)
A synchronous hot foil printer gives perfectly clear date/ code at any position required on each pack.



RF-601 可選加裝的零件

- 熱燙式製造日期/批號機，標明製造日期、保存期限等。
- 自動送料系統。
- 折角裝置(插腰裝置)，可調式置袋器等。

RF-601 Optional accessories & Special versions

- Data code, to print manufacturing date, expiry date, etc...
- Automatic feeding system.
- Gusseting device, adjustable forming box, etc.

Packing Process 包裝流程

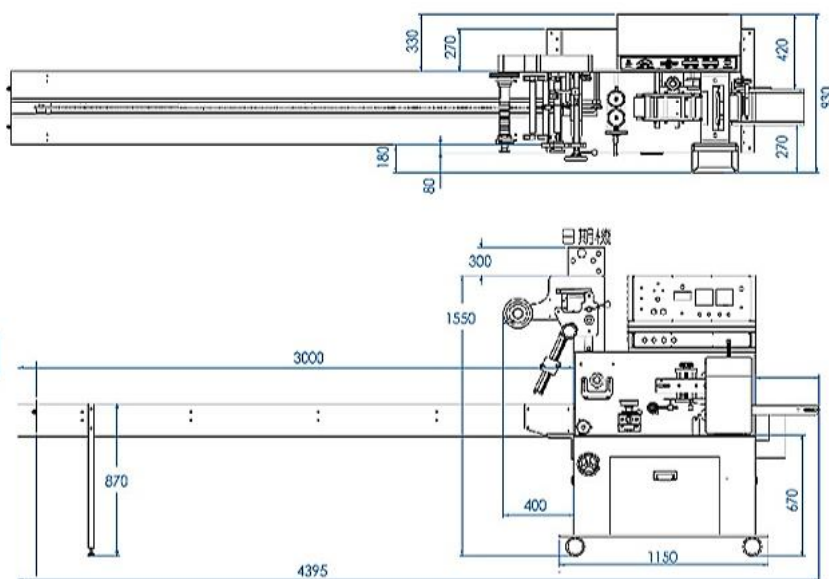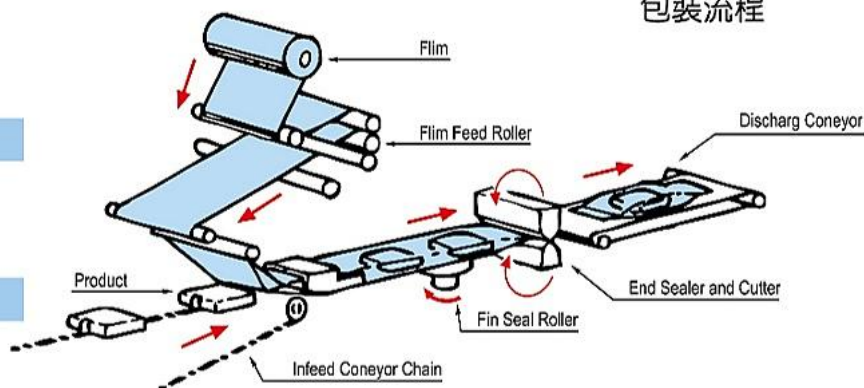

機型 MODEL	RF-601 固型物自動包裝機 Automatic Wrapping Machine		
型式 Packing type	枕狀式袋子 Pillow type	主力馬達 Main drive motor	1馬力 220V單相 50/60 Hz 1HP 220V Single phase 50/60 Hz
包裝速度 Packing speed	25-200包/分 視包裝物大小及膠膜材質 厚度而定 25-200 Bags/min Depend on packing size	輔助馬達 Control motor	減速馬達 200V, 40W Single phase motor 200V, 40W
包裝材質 Packing material	OPP, CPP, PET, 模造紙、 鋁箔合膠層等可熱封材料 OPP, CPP, PET, Alum. foil laminated, etc	縱電熱器 Vertical heater	350Wx1
包裝尺寸 Packing Size	長 (L) 65-200mm 寬 (W) 10-100mm 高 (H) 5-30mm	橫電熱器 Horizontal heater	200Wx4
裝箱尺寸 Measurement	Machine主機 1800x1000x1750 Conveyor輸送帶 3350x500x400		
毛重 G.W.	900 Kgs	淨重 N.W.	800 Kgs



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel: 886-2-29979318, 29967014 Fax: 886-2-29979319 Email: rufengmc@ms37.hinet.net

RU FENG MACHINERY CO., LTD.

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RF-601S 固形自動包裝機

Automatic Wrapping Machine

人機界面，操作更容易

速度控制

包裝速度從每分鐘25到200包可由一旋轉鈕作任意的無段調速以配合最佳生產率。

溫度控制

各封口面獨立溫度控制，適應多種包裝材料並得到最美觀、牢固的封口效果。

電眼追蹤

內藏式高感度電眼追蹤設備，即使在高速操作下亦可獲得正確之封切位置。



Length Display easy for operation,

Speed control


Any desired production rate within the range of 25-200 pack per minute may be varied infinitely by means of a single dial knob.

Temperature control

Independent temperature control for each sealer to make the best sealing and handle a wide variety of flexible packaging materials.

Photo detector(optional spare)

Built-in high sensitivity high respond photo detector insures correctly positioned, cutting even at high speed operation.

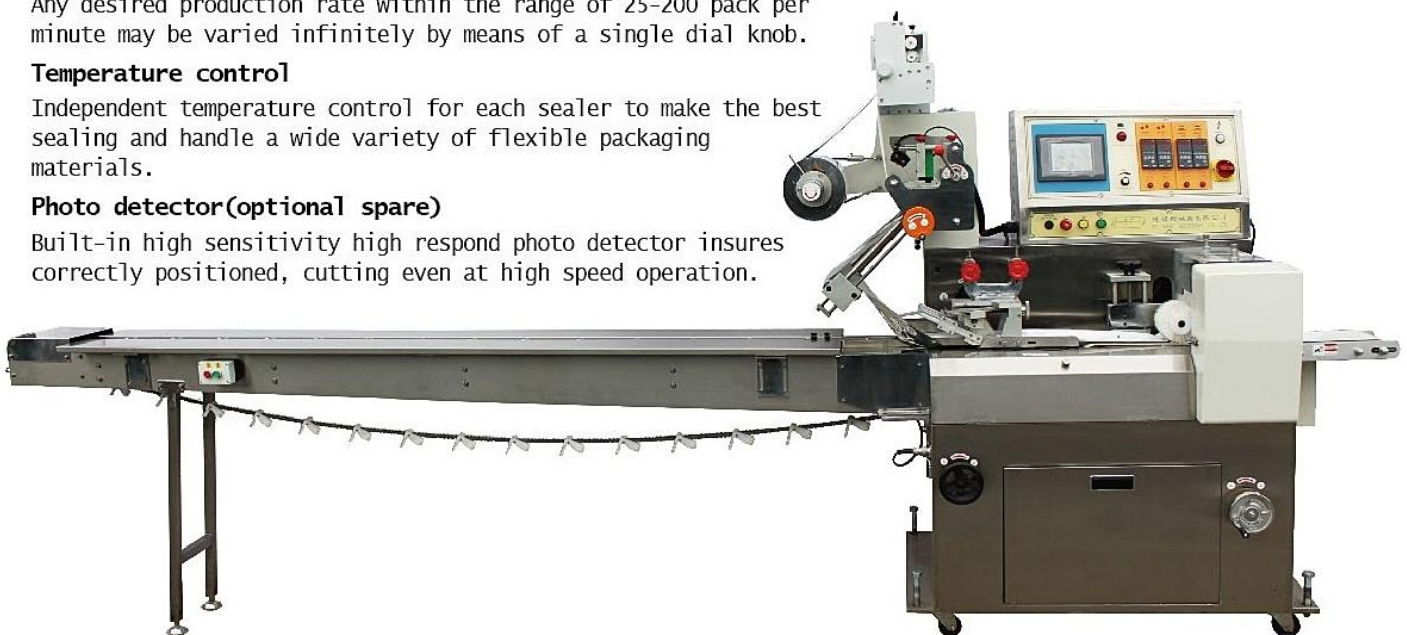

熱燙事製造日期/批號機 Hot foil code printer

熱燙式製造日期 / 批號機 (選購配備)

同步運轉之熱燙式製造日期裝備可在包裝袋之任何位置標示清晰正確之日期及批號。

Hot foil code printer (optional spare)

A synchronous hot foil printer gives perfectly clear date / code at any position required on each pack.



RF-601S 適用範圍

速食麵、餅乾、麵包、果凍、冰棒、牙刷、膠袋、香皂、面紙、藥品、零件、器材等食品雜貨及五金類同型物品之包裝。

RF-601S Application

Instant noodles, biscuits, bread, soap, toothbrushes, egg rolls, ice cream, candy bars, wet paper towels, and other solid items.

RF-601S 優異的功能

- **速度控制**
包裝速度從每分鐘25到200包可由一旋轉鈕作任意的無段調速以配合最佳生產率。
- **溫度控制**
各封口面獨立溫度控制，適應多種包裝材料並得到最美麗、牢固的封口效果。
- **電眼追蹤**
內藏式高感度電眼追蹤設備，即使在高速操作下亦可獲得正確之封切位置。
- **熱燙式製造日期/批號機**
同步運轉之熱燙式製造日期設備可在包裝袋之任何位置標示清晰正確之日期及批號。

RF-601S Features

- **Speed control**
Any desired production rate within the range of 25-200 pack per minute may be varied infinitely by means of a single dial knob.
- **Temperature control**
Independent temperature control for each sealer to make the best sealing and handle a wide variety of flexible packaging materials.
- **Photo detector**(optional spare)
Built-in high sensitivity high respond photo detector insures correctly positioned, cutting even at high speed operation.
- **Hot foil code printer**(optional spare)
A synchronous hot foil printer gives perfectly clear date/ code at any position required on each pack.



RF-601S 可選加裝的零件

- 熱燙式製造日期/批號機
標明製造日期、保存期限等。
- 自動送料系統
- 折角裝置(插腰裝置)，可調式置袋器等。

RF-601S Optional accessories & Special versions

- **Data code**
To print manufacturing date, expiry date, etc.
- **Automatic feeding system.**
- **Gusseting device, adjustable forming box,** etc.

Packing Process 包裝流程

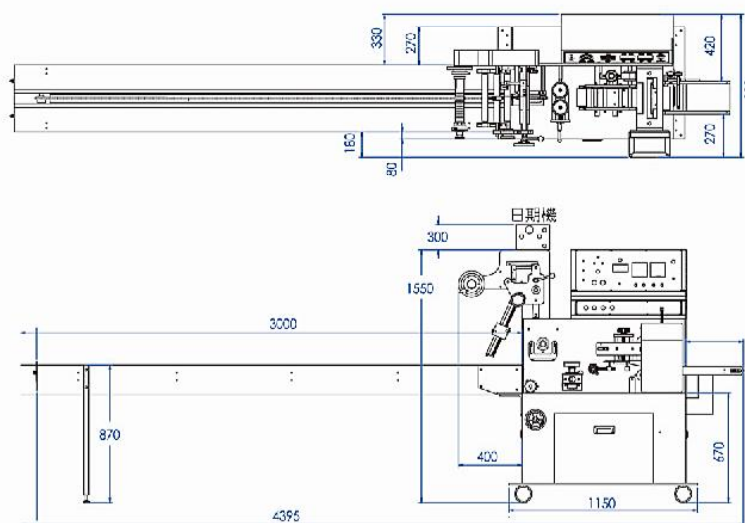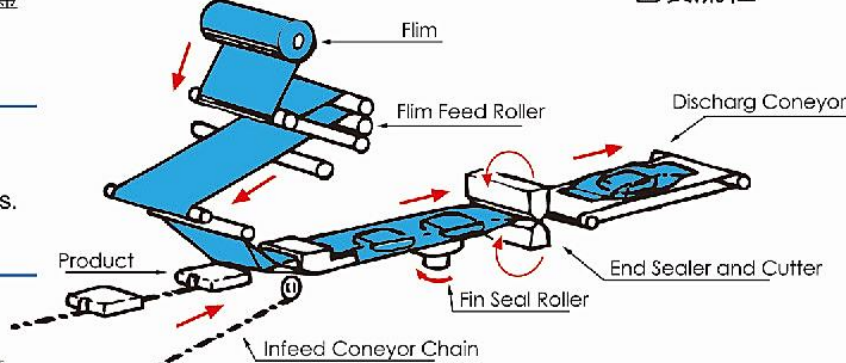

機型 MODEL	RF-601S 固型物自動包裝機 Automatic Wrapping Machine		
型式 Packing type	枕狀式袋子 Pillow type	主力馬達 Main drive motor	1馬力 220V單相 50/60 Hz 1HP 220V Single phase 50/60 Hz
包裝速度 Packing speed	30-180包/分 視包裝物大小膠膜材質 厚度而定 30-180 Bags/min Depending on packing size	輔助馬達 Control motor	減速馬達 220V, 40W Single phase motor 220V, 40W
包裝材質 Packing material	OPP, CPP, PET, 模造紙、 鋁箔合膠層等可熱封材料 OPP, CPP, PET, Alum foil laminated, etc	縱電熱器 Vertical heater	350Wx1
包裝尺寸 Packing Size	長(L)65-200mm 寬(W)10-100mm 高(H)5-30mm	橫電熱器 Horizontal heater	200Wx4
裝箱尺寸 Measurement	Machine主機 1800x1000x1750 Conveyor傳送帶 3350x500x400	毛重 G.W.	1050 Kgs
淨重 N.W.	800 Kgs		



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel: 886-2-29979318, 29967014 Fax: 886-2-29979319 Email: rufengmc@ms37.hinet.net

RU FENG MACHINERY CO., LTD.



最新

濃·粘液體二管式定量充填機

Foremost TWO-TUBES TYPE

CONDENSED VISCOUS LIQUID PRODUCTION FILLING MACHINE

**NEWLY
INTRODUCED!
PATENT PENDING**

MODEL : RF-550B2
(10c.c.-550c.c.)


MODEL : RF-2000B3
(300c.c.-2000c.c.)



Foot-pedal Switch. 腳踏式開關



**歡迎任意選購
(Optional)**

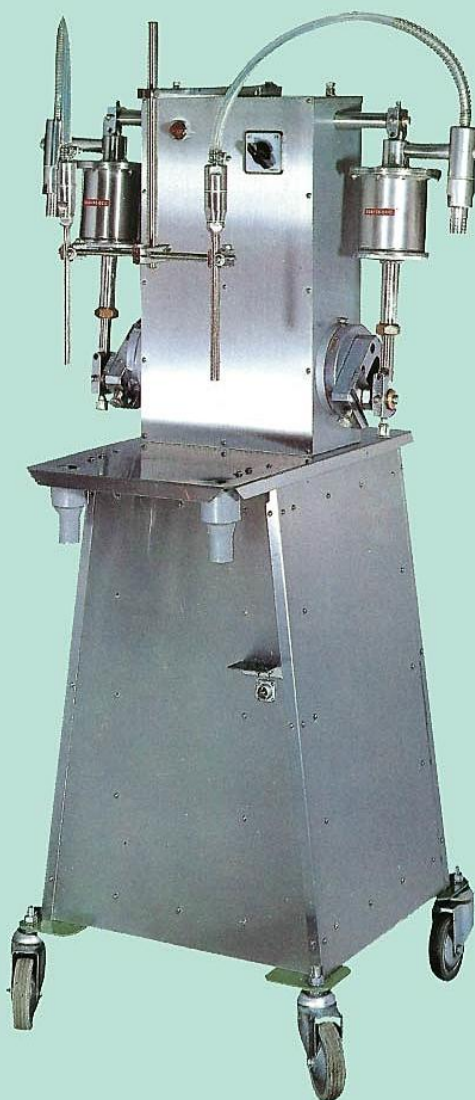

● **充填器
FILLER**

RF-550B2
10-60c.c.
30-160c.c.
100-350c.c.
200-550c.c.

● **選項
OPTION**

RF-2000B3
300-1000c.c.
500-1500c.c.
1000-2000c.c.

● **馬達
MOTOR**

1.110V AC ½HP
2.220 AC ½HP
Single Phase
3.50/60HZ

● **規格 SPECIFICATION**

能 量 Capacity : 10 c.c.-550c.c.
馬 達 Moter : ½HP 單相 50/60HZ
體 積 Dimension : 134cmHx80cmWx65cmL
Wooden Case : 154cmx90cmx75cm
重 量 Net weight : 132 kgs
Gross wt : 185 kgs



陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號


No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel:886-2-29979318,29967014 Fax:886-2-29979319 Email:rufengmc@ms37.hinet.net


Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RU FENG MACHINERY CO., LTD.

- 容量調整後六角旋帽扣緊
After adjusting volume,
tighten the Hexagonal Nut.

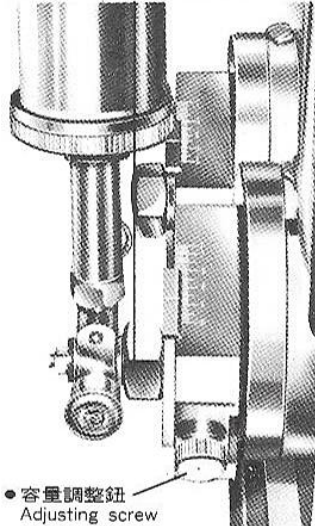

- 容量調整鈕
Adjusting screw

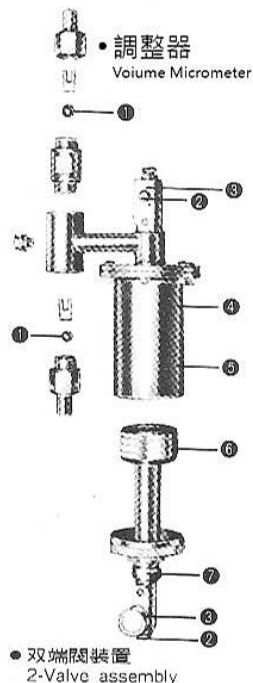

- ① 採用不鏽鋼精度製成，置有進液及出液凡而。
Intake and discharge valves were precisely made of stainless steel.
- ② 設有旋鈕連接，以保持上下端及活塞筒之操作精度。
Swivel connectors, top and bottom, maintain proper alignment between piston and cylinder.
- ③ 特種鋼製固定器設有旋夾，使連續操作時不致脫節。
Self-locking, hardened steel thumbscrews cannot loosen under continuing usage. Finger tightening locks the Filling Unit in place.
- ④ 注入筒為特種不鏽鋼精確製造而成。
Precise fabricated cylinder made of special stainless steel.
- ⑤ 注入筒筒壁為特種不鏽鋼管磨研製成。
Cylinder precision bored and honed from stainless steel tubing.
- ⑥ 置有Teflon活塞環耐磨防蝕。
Expandable and durable Teflon piston rings prevent wearing.
- ⑦ 特設外側六角旋帽，以調節Teflon活塞環之操作精度及防洩。
External adjustable knob makes it easy to expand or contract the Teflon ring for precision filling and leakage-proof.

● 優點：

- 主要機件皆由特種不鏽鋼製成，耐酸防蝕。
- 設有自動充滿指示鐘及無段變速控制。
- 每分鐘2管充填12~44瓶定量粘液，若連裝於自動輸送機，則產量更高。
- 可適用於任何種類之液體包裝輸送自動機。

● FEATURES

- All main parts are made of stainless steel, to provide anti-corrosion and acid-proof.
- Featured with filling synchronizer and stepless speed controller.
- Manual filling capacity of 2-tubes up to 12-44 bottles per minutes of viscous liquid, and higher for automatic fillings.
- The machine can be modified for special metering application.

● 用途：

- 針劑、口服液、糖漿、果汁、乳液、洗髮精、清潔劑、化學品、化粧品等之定量充填。


● APPLICATION

- For Volumetric filling of ampoules, oral liquid, syrup, popsicle mixes, cream, detergents, hair cleansing lotion, parlor liquid, chemicals, etc.

● 本機效能：

備用之充填液經抽取後，不致形成真空負壓及超量之滯留充填，仍可使液流從進液至供液，不因管之長度及液面之高低，在每一活塞上行行程時，持續壓出高準度之定量充填液，單管及雙管皆適用。


圖示：活塞(B)下行抽液時，經由進液之球閥口(C)至節筒，在活塞上行(B)供液時，則再經供液球閥口(F)；經此行程之充填液至出口(G)，可不致液流滯留及出超定量；並可調節所需之精確定量充填液。

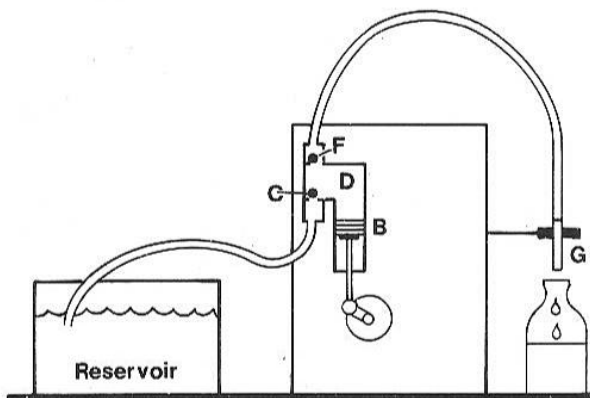

● EFFICIENCY

The principle of positive displacement filling eliminates vacuum lines and overhead reservoirs. Liquid is drawn from a floor or bench level reservoir into the Filling Unit through a length of flexible tubing. Each upward stroke of the piston then discharges an accurate, preset volume of fluid through the outlet tubing into the container. Fillers are available with 1, 2 or 4 nozzles.

Fig On the suction stroke of piston (B) liquid is drawn past the intake ball check (C) into cylinder (D). On the discharge stroke, liquid is forced from the cylinder by the piston (B) and passes through outlet ball check (F). Free spinning action of the valve balls prevent the accumulation of foreign matter on the valve seats. A length of flexible tubing connects outlet valve (G) to a nozzle. The volume dispensed is governed by the length of the piston stroke.

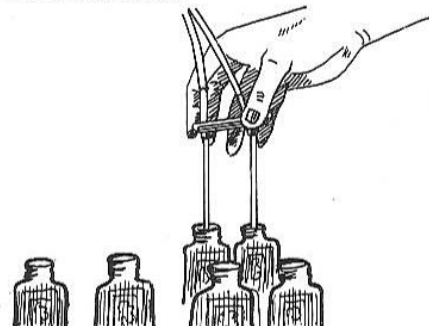

陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號

No.11, Ln. 211, Huacheng Rd., Xinzhuang District, New Taipei City 24252, Taiwan (R.O.C.)

Tel: 886-2-29979318, 29967014

Fax: 886-2-29979319

Email: rufengmc@ms37.hinet.net

Our Website <http://www.rufengmc.com.tw> <http://www.tacocity.com.tw/kwlin>

RU FENG MACHINERY CO., LTD.

自動充填包裝機 (附電眼裝置) AUTOMATIC FILLING/PACKING MACHINE

(With photocell control)

RF-301



MODEL:

RF-301: 三面封口, Three side sealing.

RF-304: 四面封口, Four side sealing.

RF-300: 不含電眼追蹤, Without photo-cell.

• 適用包裝物:

砂糖, 鹽, 速食面調味料, 粉狀藥物, 茶葉咖哩粉, 奶粉, 洗發粉, 糖果, 藥片等其他相類似的粉狀物及顆粒狀物品。

MAIN APPLICATIONS:

Sugar, salt, tea, powder, medicine, ferment powder, curry powder, coffee powder, milk powder, candy, shampoo powder, tablets, and the other similar powder & granules substances.

規格

裝箱尺寸: 1.2M³ N.W.: 380Kgs

SPECIFICATIONS

MEASUREMENT: 1.2M³ G.W.: 450Kgs


包裝型態 Packing type	包裝材質 Packing Materials	包裝尺寸 Packing sizes	包裝容量 Packing volume
三面或四面封口 3or4sides seal	O.P.P.+P.E. PET+PE 鋁箔合膠層, 模造紙 O.P.P.+P.E.S. PET+PE aluminum foil similar paper, laminations etc.	長 40~130mm 寬 20~100mm 40-130mm/length. 20-100mm/width.	0~50 克 0-50 gram

包裝能量 packing capacity	主力馬達 Main drive motor	控制馬達 Control motor	使用電力 Power	電源設備 Electric facilities	縱電熱器 Vertical heater	橫電熱器 Horizontal heater	機械尺寸 Machine size
30~120 袋/分 (視包裝物大小而定) 30-120bag/min. (Depending upon packing size)	1/4 馬力 × 1 個 1/4HP × 1set	1/35 馬力 × 1 個 1/35HP × 1set	1.5KW 1.5KW	220V 單相 as required 220V 1phase	150W × 2 支 150W × 2pcs	250 × 2 支 250 × 2pcs	1785(高) × 800 × 550mm 1785(H) × 800 × 550mm

自動液體充填包裝機 (附電眼裝置) AUTOMATIC LIQUID FILLING/PACKING MACHINE

(With photocell control)

RF-302

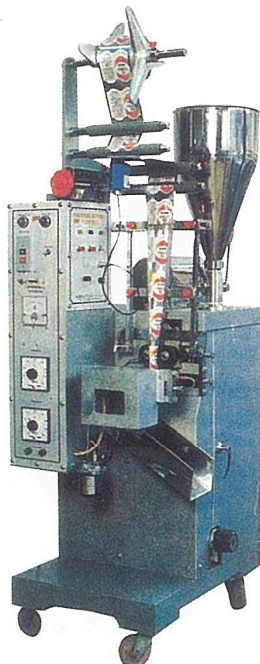

型號: MODEL

RF-302: 普通型 Ordinary

RF-302L: 加大型 Large Type

RF-302G: 含顆粒狀 With Granules

• 適用包裝物:

果汁, 醬油, 肉油, 沙拉油, 牛奶, 藥水, 洗發精, 沙拉醬, 番茄醬, 沙茶醬, 醬油膏, 蜂蜜, 果醬, 油脂和其他相類似的液態及糊狀物

MAIN APPLICATIONS:

Juice, soy sauce, meat sauce, milk, medical solution, oil liquid, shampoo, salad sauce, ketchup, soy paste, honey, jam, grease, and the other similar liquid and paste substances.

規格

N.W.: 380Kgs

SPECIFICATIONS

G.W.: 450Kgs

包裝型態 Packing type	包裝材質 Packing materials	包裝尺寸 Packing sizes	包裝容量 Packing volume
三面或四面封口 3or4sides seal	鋁箔, 尼龍膜 Aluminum Foil nylon film lamination	長 40~130mm 寬 20~100mm 40-130mm/length. 20-100mm/width.	0-30cc

包裝能量 packing capacity	主力馬達 Main drive motor	控制馬達 Control motor	使用電力 Power	電源設備 Electric facilities	縱電熱器 Vertical heater	橫電熱器 Horizontal heater	機械尺寸 Machine size
40~120 袋/分 (視包裝物大小而定) 40-120bag/min. (Depending upon packing size)	1/4 馬力 × 1 個 1/4HP × 1set	1/35 馬力 × 1 個 1/35HP × 1set	1.5KW 1.5KW	220V 單相 as required 220V 1phase	150W × 2 支 150W × 2pcs	250 × 2 支 250 × 2pcs	1785(高) × 800 × 550mm 1785(H) × 800 × 550mm



最新

高粘度、液體、軟膏定量自動充填機

LATEST

HIGH VISCOSITY LIQUID AND PASTE VOLUMETRIC FILLING MACHINE

NEWLY INTRODUCED!
PATENT PENDING



PATENT NO. 18560

用 途：

軟膏、外敷膏液、磨砂膏、洗面乳、糖漿、菓汁、花生醬、口服液、洗髮精、清潔劑、洗碗精、化學化粧品、醬油膏、沙拉醬等之定量充填。

Application:

For volumetric filling of ointment, salve for external use, cream, syrup, popsicle mixes, peanut butter, oral liquid, hair cleaning lotion, detergents, salatt, soysauce paste chemical, parlor liquid, cosmetics, etc.

MODEL : RF-160

能 量 : Capacity : 3~120gm

充填管 Filler : 3~20gm
10~60gm
30~120gm } 可任意選購
Optional

馬 達 : Motor : 1/2 HP

儲料桶 : Hopper(Storage Tank) : 36ℓ

體 積 : Machine Dim. : 83x50x180(cm)(LxWxH)

Packing Dim. : 93x60x195(cm)(LxWxH)

重 量 : Net. WT. : 115kgs

Gr. WT. : 170kgs

MODEL : RF-180

能 量 : Capacity : 100~600gm

馬 達 : Motor : 1 HP

儲料桶 : Hopper(Storage Tank) : 42ℓ

體 積 : Machine Dim. : 88x52x190(cm)(LxWxH)

Packing Dim. : 98x62x205(cm)(LxWxH)

重 量 : Net. WT. : 135kgs

Gr. WT. : 210kgs

歡迎選購 **OPTIONAL**

Hopper Water jacketted with Heater & thermo-controller.

Air Compressor ¼ HP

本機效能：

備用之充填膏液經抽取後不致形成真空負壓及超量之滯留充填，仍可使膏液流從進膏液至供膏液不因管之長度及膏液面之高低在每一活塞上行時保持續壓必高準度之定量充填膏液。

Principle:

The principle of the positive displacement filling eliminates vacuum lines and overhead reservoir. Liquid is sucked in from a floor or bench level reserving tank into the filling unit through a flexible plastic tube. Each upward stroke of the piston discharges an accurate, pre-set volume of fluid through the outlet tube into the container. Pneumatic blowing device for cutting drop of liquid or paste on filling nozzle end. Optional.

優 點：

主要機能皆由特種不鏽鋼製成。

設有自動充滿指示鐘及皮帶式有段無段變速，控制充填量之速度。任何容器均可充填。

每分鐘充填8~23瓶。

●特色空壓充填管口垂液吹斷裝置 ●另訂購






Features:

All main parts are made of stainless steel.

Features with filling synchronizer and variable speed controller.

Filling speed 8~23 bottles per minutes.

The machine can fill nearly all kinds of containers.

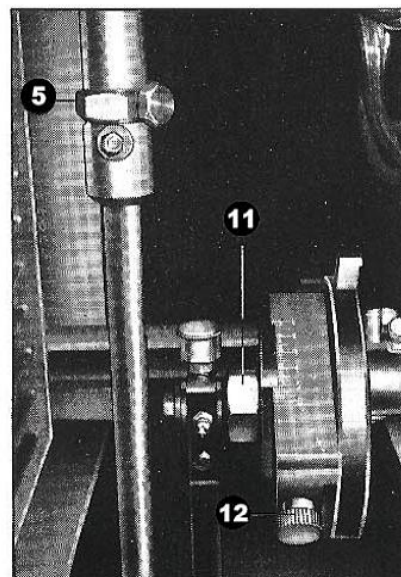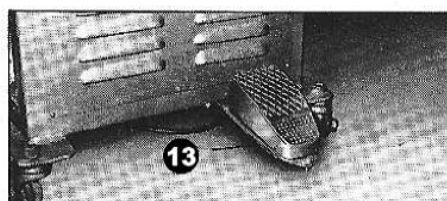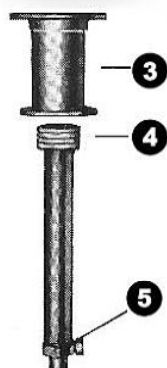

- ① 採用不鏽鋼高精度製成，置有進膏液之凡而。
- ② 設有保持上下端及活塞筒之操作精度。
- ③ 下配件之注入筒為特種不鏽鋼精確製造而成。
- ④ 置有Teflon活塞環耐磨防蝕。
- ⑤ 特設外側六角旋帽以調節Teflon活塞環之操作精度及防洩。
- ⑥ 不鏽鋼配件
- ⑦ 不鏽球閥
- ⑧ 不鏽彈簧
- ⑨ 不鏽鋼軟膏充填管
- ⑩ 網式液體充填管
- ⑪ 容量調整後六角旋帽扣緊
- ⑫ 容量調整鈕
- ⑬ 腳踏式開關
- ⑭ 液體進液配件

- ① Intake and discharge valves made of special stainless steel and tooled by precision machines
- ② Swivel connectors, top and bottom, maintain proper alignment between piston and cylinder.
- ③ Cylinder and attachments precisely fabricated from special stainless steel
- ④ Expandable Teflon piston rings prevent piston from wearing and corrosion
- ⑤ External adjustment knob makes it easy to expand or contract the ring for precision filling and leak-proof
- ⑥ Attachment stainless steel (accessories)
- ⑦ Stainless steel ball valve
- ⑧ Stainless steel spring
- ⑨ Stainless steel filling tube
- ⑩ Filling tube with screen for filling 0-1500 CPS
- ⑪ After adjusting volume, tighten the Hexagonal Nut
- ⑫ Adjusting screw
- ⑬ Foot- pedal Switch
- ⑭ Liquid intake adaptor

本機效能：

備用之充填膏液經抽取后不致形成真空負壓及超量之滯留充填，仍可使膏液流從進膏液至供膏液不因管之長度及膏液面之高低在每一活塞上行程時保持續壓必高準度之定量充填膏液。

優點：

主要機能皆由特種不鏽鋼製成。

設有自動充滿指示鐘及皮帶式有段無段變速，控制充填量之速度。

每分鐘充填8~23瓶。

任何容器均可充填。

用途：

軟膏、外敷膏液、磨砂膏、洗面乳、糖漿、藥汁、花生醬、口服液、洗髮精、清潔劑、化學化粧品等之定量充填。

Principle:

The principle of the positive displacement filling eliminates vacuum lines and overhead reservoir. Liquid is sucked in from a floor or bench level reservoir tank into the filling unit through a flexible plastic tube. Each upward stroke of the piston discharges an accurate, pre-set volume of fluid through the outlet tube into the container.

Features:

All main parts are made of stainless steel.

Featured with filling synchronizer and variable speed controller.

Filling speed 8~23 bottles per minutes.

The machine can fill nearly all kinds of containers.

Application:

For volumetric filling of ointment, salve for external use, cream, syrup, popsicle mixes, peanut butter, oral liquid, hair cleaning lotion, detergents, chemical, parlor liquid, cosmetics, etc.

服務項目

各種製葯・化粧品・化學機械
不鏽鋼製品
設計承造

MAIN LINE

Designing, manufacturing and exporting machinery for pharmaceutical, Cosmetic, and Chemical Industries, and related Stainless Steel Accessories & components.



陸鋒機械廠有限公司
RU FENG MACHINERY CO., LTD.

242新北市新莊區化成路211巷11號
No.11, Ln. 211, Huacheng Rd., Xinzhuang District,
New Taipei City 24252, Taiwan (R.O.C.)

Tel: 886-2-29979318, 29967014 Fax: 886-2-29979319

Email: rufengmc@ms37.hinet.net



Our Website <http://www.rufengmc.com.tw>

<http://www.tacocity.com.tw/kwlin>



RF-106H 袖珍包面紙製造機

Pocket Facial Tissue Making Machine

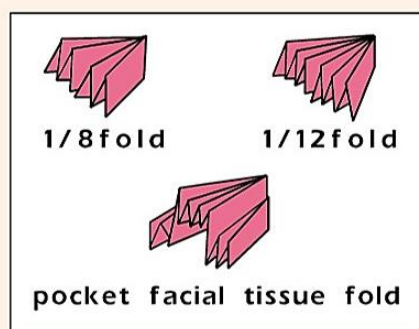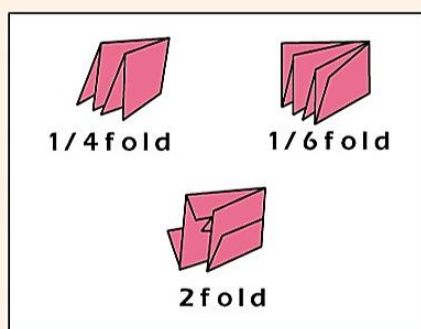

特點:

摺疊、定型、橫交互摺疊、切斷、計數、計量，而生產出攜帶方便的袖珍面紙。
亦有長度微調裝置，故障少、損紙率低、投資小、產量大。

Detail Specifications / Descriptions

Folds, sets shape, interfolds, cuts, counts, and measures

Micro-adjustable length helps lower breakdown rate and waste

Less investment but high capacity

型號	Model No.	RF-106 H	原紙直徑	Parent roll dia.	Ø1200mm(Max)
面紙尺寸	Sheet size	(L) 210mm x (W)210mm	紙蕊直徑	Core dia.	Ø76.2mm
摺疊尺寸	Folded size	(L) 105mm x (W)72mm	馬力	Power	3HP(Inverter) + 2HP (AC) motor
生產能量	Capacity	500~1000 sheets/min.	機械尺寸	Machine size	(LxWxH) 3600x1100x2090 mm
卷紙層數	Converting web	1~3 layer facial tissue peper	淨重	N.W	1500 kgs
原紙寬度	Parent roll width	180~220mm	毛重	G.W	1900 kgs

陸鋒機械廠有限公司

242新北市新莊區化成路211巷11號
TEL:02-29979318, 29967014.
FAX:02-29979319
Http://www.rufengmc.com.tw

RU FENG MACHINERY CO.,LTD.

No.11, Ln. 211, Huacheng Rd., Xinzhuang District,
New Taipei City 24252, Taiwan (R.O.C.)
EM:rufengmc@ms37.hinet.net
Http://www.tacocity.com.tw/kwlin